

DESCRIPTION

4" round recessed trimless gasketed showerlight fixture. U.L. listed for wet location. For use with 12V MR16 lamp 37W max. or CMHMR16 20W or 39W.

For use in downlighting applications and wet locations.

| Catalog # | | Type |
|-------------|--|------|
| Project | | |
| Comments | | Date |
| Prepared by | | |

SPECIFICATION FEATURES

A...Trimless Fixture

Round trimless showerlight fixture. Includes bullet plunger retainers for smooth snap-in action during installation and removal of trim for relamping. Helps guard against plaster cracking.

B...Lamp

For use with 12V MR16 lamp 37W max. or CMH MR16 20W or 39W. Lamp not included. Solite soft focus lens. Lens is secured with tensions springs which allow the lens to retract for access to remove the trim for relamping. The springs ensure that the lens re-seals itself against the gasket after maintenance. Fixture can accept up to one (1) optical accessory.

C...Socket


Posi-Grip bi-pin socket for 12V MR16. GX10 for metal halide lamps. (Included with Quiet Ceiling Housing sold separately)

D...Finish

Trim face is powder coated in white, black, industrial silver, stainless steel or primer finish for painting in existing ceiling color. All other internal components are flat black.

E...Safety

Steel safety cable provided. Attaches to tab inside housing to prevent falling during maintenance or as a result of accidental dislodging of the trim.

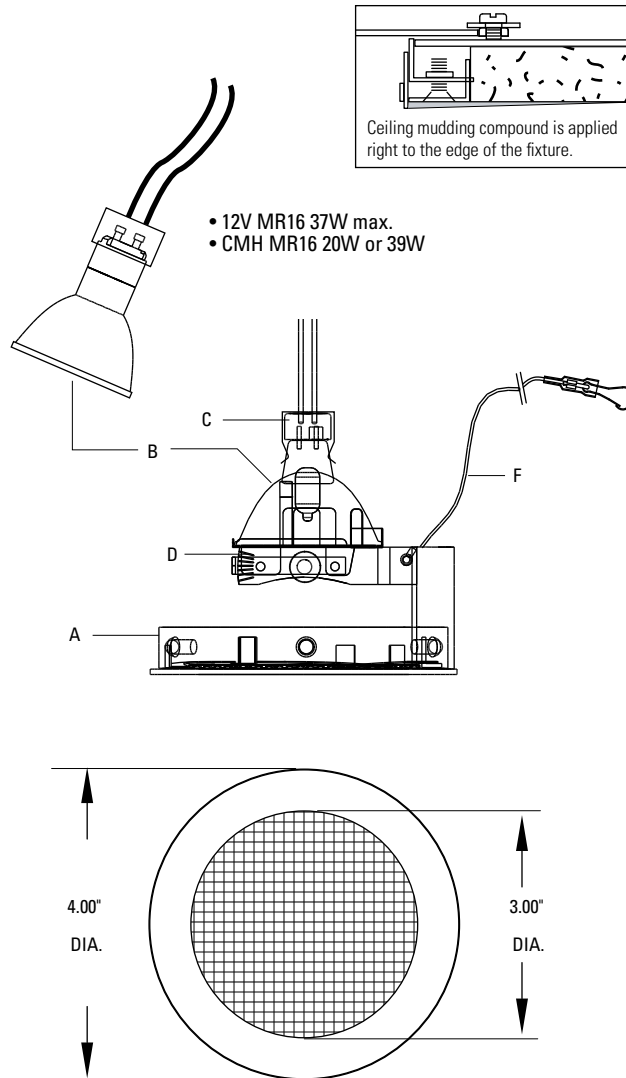

QUIET CEILING TRIMLESS

QCT1976 4" Round Trimless Recessed Showerlight Fixture

FOR 12V MR16 37W max.
CMH MR16 20W or 39W

Compatible Housings:

QCT900 / QCT900MH

QCT902IC / QCT902ICMH

QCT904RM / QCT904RMMH

QCT906SP / QCT906SPMH



Wet Location

ORDERING INFORMATION

| QCT1976 | |
|---|---|
| Fixture QCT1976 = 4" Round Trimless Showerlight Fixture for 12V MR16, CMH- MR16, or ES16MH | Finish WH = White BK = Black S = Industrial Silver SS = Stainless Steel (painted) PM = Primer |